




HR 400

KABOLA Heating Systems B.V.

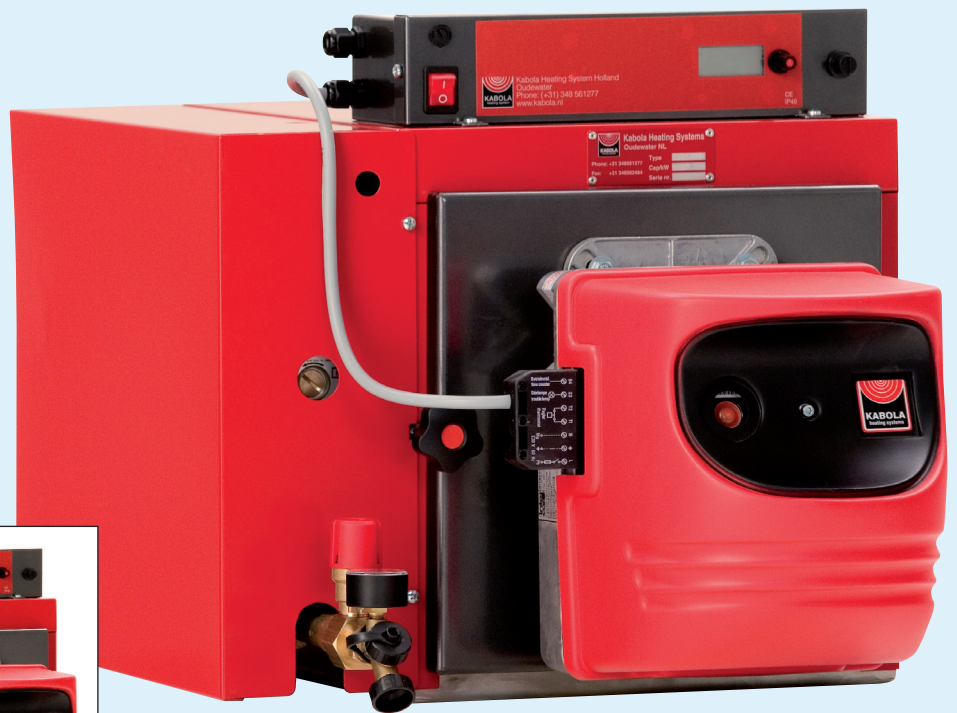

HR 400 combi

HR 400




ALWAYS A WARM WELCOME ON BOARD

HR 400

The HR 400 is the first development in the HR series. With this unit Kabola step into a new way of developing central heating units (on diesel). The HR 400 is also a very compact unit. The HR 400 is available in normal central heating, central heating with a calorifier control, to heat up an external calorifier and a combi. With the HR 400 combi you will have the comfort of central heating and hot water supply without losing extra space.



TECHNICAL DETAILS

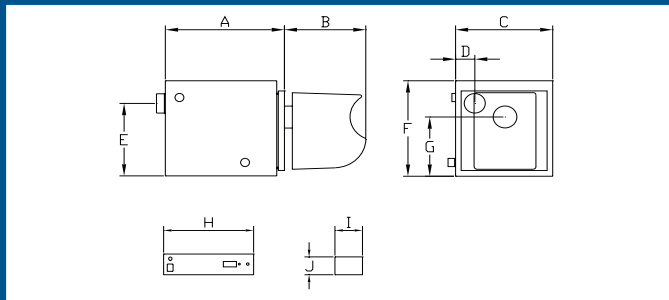

HR 400	HR 400 combi	Digital dashboard
A 455 mm	455 mm	H 344 mm
B 255 mm	255 mm	I 75 mm
C 370 mm	500 mm	J 111 mm
D 75 mm	295 mm	
E 298 mm	298 mm	
F 392 mm	392 mm	
G 243 mm	243 mm	

TECHNICAL DETAILS		HR 400	HR 400 combi
Flue gas diameter \varnothing	mm	80	80
C.H. connection	mm	22	22
Hot sanitary water connection	mm	15	15
Hot sanitary water 60°C	L/min		5
Max. Capacity	kW	14	14
Service pressure	Bar	2	2
Working pressure	Bar	3	3
Weight	Kg	70	75
Flue gas temp. max.	°C	230	230
Efficiency	%	90	90
Chimney length horizontal max.	M	5	5
Power consumption 24V	A	6,9	6,9
Power consumption 230V starting load	W	740	740
Operating load	W	230	230
Fuel		Diesel	Diesel



OPTIONS

To enable even more space on the top of the unit the digital dashboard of the HR series can be assembled at the front of the unit above the burner, with a support.

All Kabola boilers have been designed for permanent use.

Do you need other heating capacity?
Check our website, contact us or your dealer:

www.kabola.nl

Your dealer:



KABOLA Heating Systems B.V.

Industrieterrein Tappersheul
Populierenweg 41
3421 TX Oudewater Holland
Tel. (+31) 348 - 561277
Fax (+31) 348 - 562484
www.kabola.nl post@kabola.nl