

# Ventilation louvres for class B15 doors


## Dørspjeld rustfritt Stål for B15 dører - marine

- Stainless steel (AISI304- BA)
- Other material on request
- Painted on request

For door thickness - DT: 25 - 40mm

Note ! DT is limited with Thermal fuse and Open-Close function from both sides ( 35-40mm)

Det Norske  
Veritas Certificate  
no: F-19544

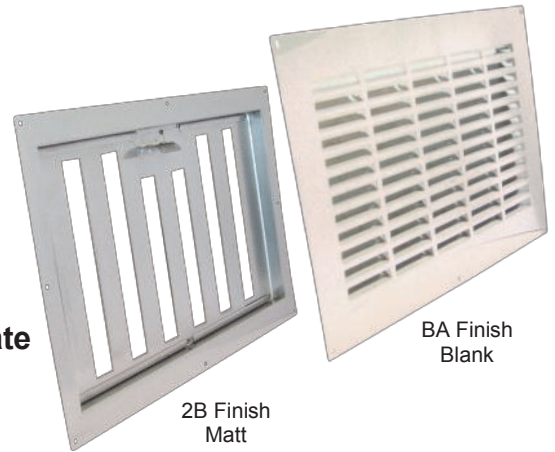

Art.no.	Nobbnr	Description Beskrivelse	Air inlet Luftareal	Out.dim. Utv.dim	Cutout dim. Utskjæringsmål
100390	22213995	Matched set			
100391	22214118	Grill with damper	100 cm <sup>2</sup>	330 x 160mm	300 x 125mm
100392	22214126	Grill - not open/close			
100400	22214001	Matched set			
100401	22214068	Grill with damper	150 cm <sup>2</sup>	330 x 210mm	300 x 175mm
100402	22214134	Grill - not open/close			
100410	22214019	Matched set			
100411	22214076	Grill with damper	200 cm <sup>2</sup>	440 x 210mm	410 x 175mm
100412	22214142	Grill - not open/close			
100420	22214027	Matched set			
100421	22214084	Grill with damper	300 cm <sup>2</sup>	550 x 235mm	520 x 200mm
100422	22214159	Grill - not open/close			
100430	22214035	Matched set			
100431	22214092	Grill with damper	400 cm <sup>2</sup>	550 x 285mm	520 x 250mm
100432	22214167	Grill - not open/close			
100440	22214043	Matched set			
100441	22214100	Grill with damper	500 cm <sup>2</sup>	550 x 350mm	520 x 315mm
100442	22214175	Grill - not open/close			
100470 - for all dimensions	22214050	Above supplied with thermal fuse closing damper at 70-73°C (158-163°F) Additional for all dimensions			

Matched set = Komplet sett, 2 rister + stengbar del (Two grilles + damper)

Grill with damper = Rist + Stengbar del Grill - not open/close = Rist - ikke stengbar

Thermal fuse closing at 70-73°C = Smeltesikring for automatisk stengning ved 70-73°C

Thermal fuse can be replaced, but not installed later when ordered without thermal fuse.

